


1/8-INCH FIREROD® CARTRIDGE HEATERS

Miniature FIREROD® Provides Maximum Performance Where Space Is Limited

The Watlow® FIREROD® not only set the industry standard for cartridge heaters, it continues to make improvements in construction and design. Among these innovations is the 1/8-inch FIREROD. This miniature cartridge heater with swaged construction features high watt density, is capable of high operation temperature and provides long life in applications where it is essential to have a very small size. Like all of Watlow's other FIRERODs, the 1/8-inch contains a resistance wire closer to the sheath and compacted MgO insulation, which maximizes heat transfer.

Typical Applications

- Gas chromatographs
- Ink jet printers
- Packaging
- Freeze protection

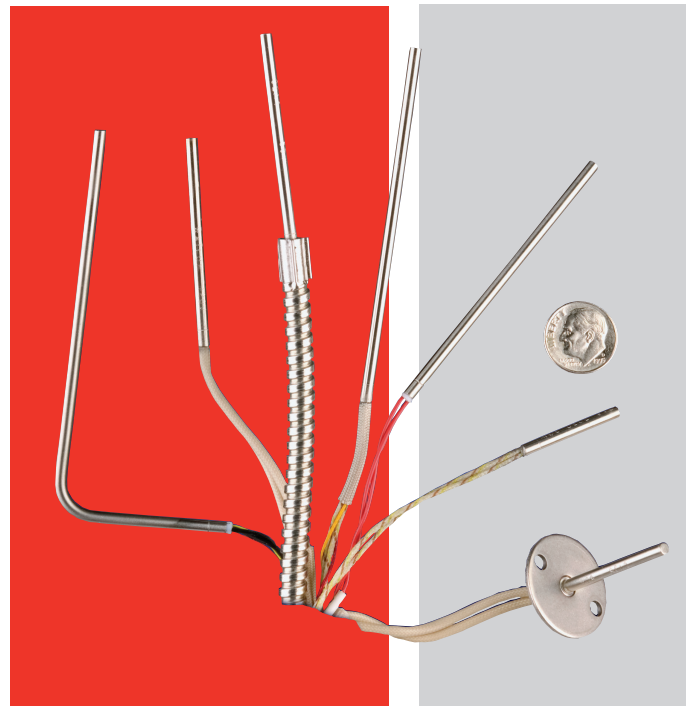

Features and Benefits

Miniature size

- High performance in a small package

Low mass

- Better heat transfer
- Quicker response time
- Longer life due to lower internal temperature

Swaged construction

- Higher watt density
- Higher temperature capability
- Maximum heat transfer
- Increased dielectric strength

Internal thermocouple option

- Ideal solution for space-restricted applications

Stock availability

- Stock heaters are available ranging in sizes from 1/4 to two inches (32 to 51 mm) in length. Check product catalog for sizes and electrical rating.

Specifications

Sheath

- Inconel® is standard
- 304 stainless steel is available

Maximum Application Temperature

- 1400°F (760°C)

Maximum Voltage

- 240V

Maximum Wattage at 240V

- 744 W

Maximum Amperage

- 3.1 amp

Wattage Tolerances

- +10 percent, -15 percent


Dimensions

- Actual diameter is 0.122 in. (3.10 mm) ± 0.002 in. (0.05 mm)
- Minimum overall length is 0.875 in. (22.22 mm)
(Minimum length may change based on lead construction, volts and watts, please consult factory.)
- Maximum overall length is 12 in. (304.8 mm)
- Length tolerance 3 in. (76 mm) and less ± ³/₃₂ in. (2.4 mm)
- Length tolerance greater than 3 in. (76 mm) ± 3 percent
- Maximum 0.0001 in. (0.0025 mm) over or under dimensional tolerance is acceptable


Construction

- Solid lead wire is standard, but stranded is available
- Lead options (see illustrations):
 - Crimped-on
 - Swaged-in
- Lead types are:
 - Fiberglass 482°F (250°C)
 - High temperature fiberglass 842°F (450°C)
 - Teflon® 392°F (200°C)
- Moisture resistant option: Teflon® seal and leads available
- Welded end-disk is standard
- Internal thermocouple available
 - Thermocouple embedded in the end-disc "C" location
 - Type J or K available (solid lead wire)
 - Swaged-in, fiberglass 482°F (250°C)
 - Swaged-in Teflon® 392°F (200°C)
 - For available lengths, consult factory
- Lead protection options
 - Stainless steel braid crimped over lead end
 - Stainless steel flexible hose crimped over lead end
- Other options
 - Bent heaters up to 90° angle
 - One inch diameter mounting flange (FS flange)

Lead Options

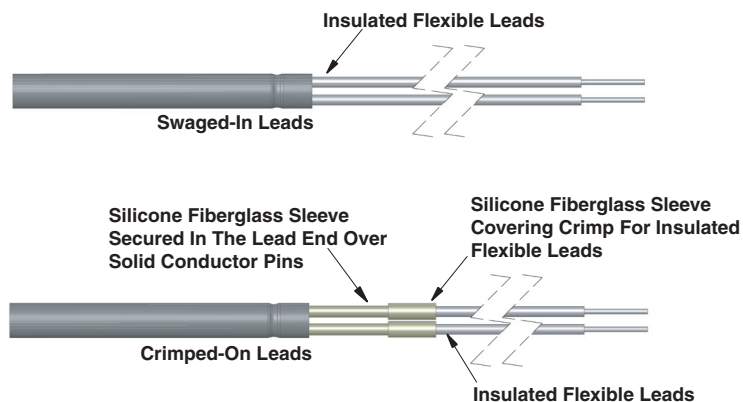

Internal Construction

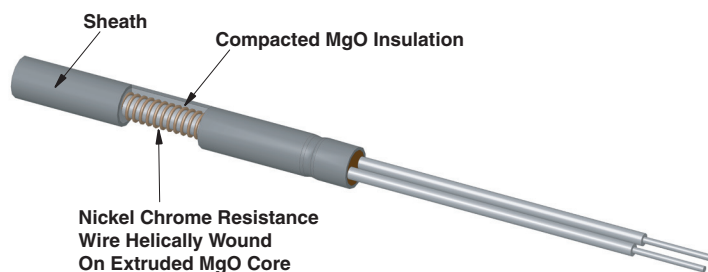

Watlow® and FIREROD® are registered trademarks of Watlow Electric Manufacturing Company.

Inconel® is a registered trademark of the Special Metals Corporation.

Teflon® is a registered trademark of E.I. du Pont de Nemours & Company.

To be automatically connected to the nearest North American Technical Sales Office:

1-800-WATLOW2 • www.watlow.com • inquiry@watlow.com

International Technical Sales Offices: Australia, +61 3 9335 6449 • China, +86 21 3532 8532 • France, +33 1 41 32 79 70
Germany, +49 (0) 72 53 / 94 00-0 • India, +91 40 6661 2700 • Italy, +39 024588841 • Japan, +81 3 3518 6630 • Korea, +82 2 2628 5770
Malaysia, +60 3 8076 8745 • Mexico, +52 442 217 6235 • Singapore, +65 6773 9488 • Spain, +34 91 675 12 92
Taiwan, +886 7 288 5168 • United Kingdom, +44 (0) 115 964 0777